

3M Science.
Applied to Life.™

Ease and efficiency all the way down the line.

Get in the fast lane and apply your
3M™ Pavement Marking Tapes with highway
tape applicators manufactured to 3M
specifications by Century Tool Inc.

Step up to easy applications.

Prep, apply and finish your inlay, overlay and grooved surface applications faster and easier than ever. Designed to increase productivity and improve user experiences, these applicators have the features you want with the ease-of-use you need.

Step 1 Spray

Primer Spray Applicator

Apply an even coat of sprayable adhesive to pavement when preparing it for pressure sensitive adhesive markings.

- ▶ Reduce primer waste
- ▶ Easy clean-up



Step 2 Apply

See chart on back to compare applicators

Enhanced Highway Tape Applicator


Apply pavement marking tapes easily and reliably with the Enhanced Highway Tape Applicator (EHTA).

- Reliable tape feeding and easy threading capabilities
- Serrated blade cuts tapes cleanly

Manual Highway Tape Applicator

Easily and continuously apply pavement marking tape without jamming or tape fold-over with the Manual Highway Tape Applicator (MHTA). Its anti-stick knife assembly lets you easily cut standard thickness tapes.

- Pull-back handle for easier and straighter applications
- Blade design allows for passing lane applications
- Applies and cuts two rolls of tape simultaneously
- Applies all 3M™ Pavement Marking Tapes at maximum standard roll lengths

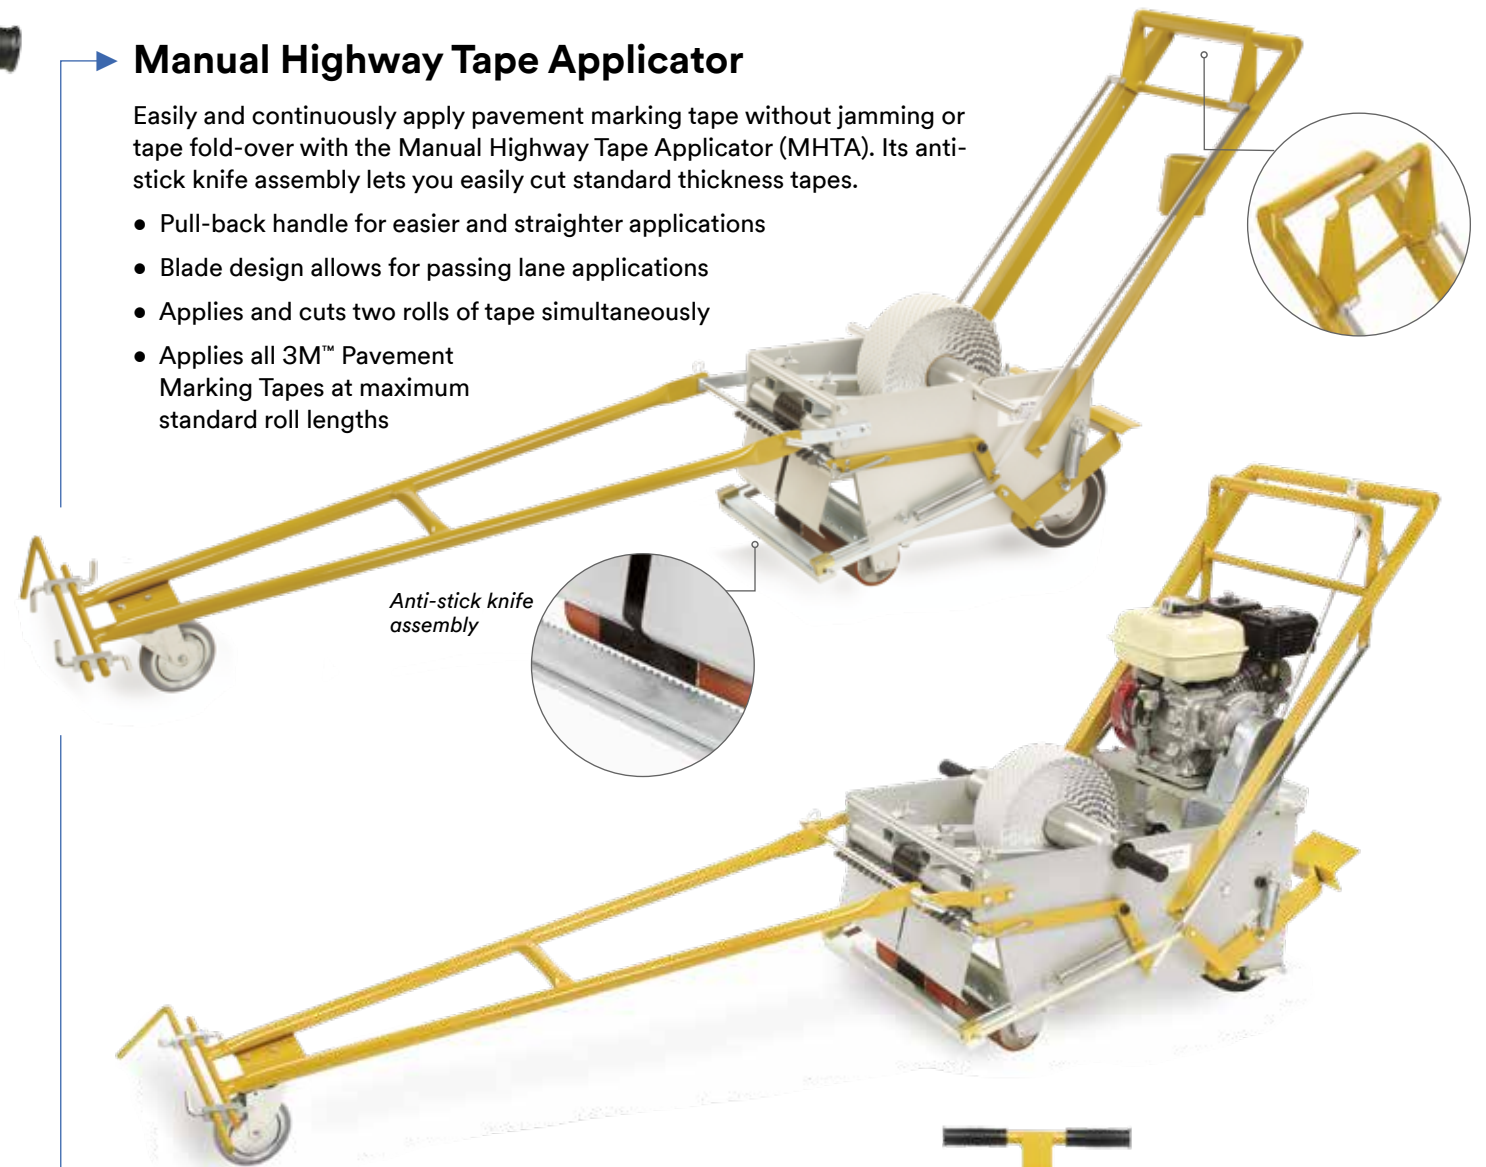

Motorized Manual Highway Tape Applicator


Get the benefits and precision of the MHTA with the power to do more. The self-propelled Motorized Manual Highway Tape Applicator (MMHTA) features wider tape width capabilities for an expanded range of applications.

- Combinations of solid and skip lines can be applied simultaneously
- Applies two 6-inch tapes with 6 inch spacing between lines
- Single line widths up to 12 inches can be installed as a solid line or skip lines
- Applies all 3M™ Pavement Marking Tapes at maximum standard roll lengths


Step 3 Tamp Tampers Cart

Apply the amount of pressure your specifications call for with the Tampers Cart.

- Holds up to 200 lbs. of weights
- 8-inch rubber roller

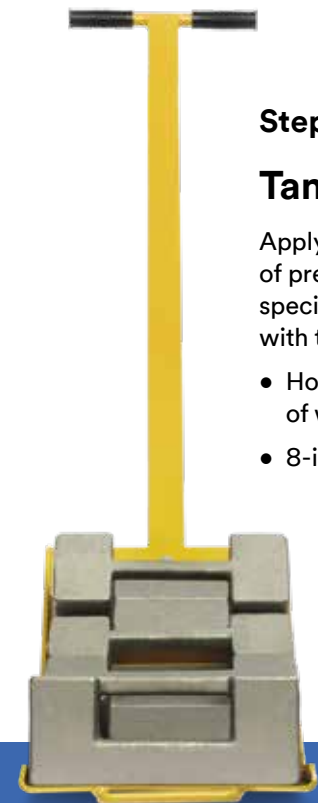

Tape Application Equipment

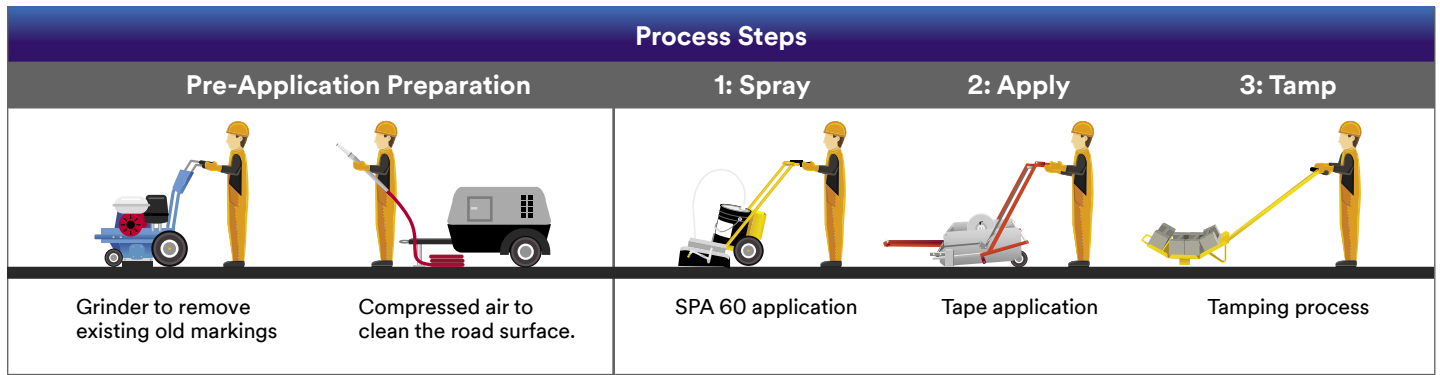

Get us on the line.

3M offers 24/7 support to help ensure your success in the planning and installation of our pavement markings. Our easy-to-apply products are even easier to have confidence in with the help of our dedicated application engineers. They understand the conditions and challenges you face during installation, and they can help you select the products that are going to be best for your particular job to ensure you're happy with the results. **Contact an application engineer at 1-800-553-1380.**

Feature	MHTA	MMHTA	EHTA	Sprayer	Tamper
Max Width	12" (0.30 m)	12" (0.30 m)	12" (0.30 m)	27" (0.68 m)	8" (0.20 m)
Self Propelled	No	Yes	No	No	No
Double Line Capability	Yes 4"-4"-4" & 6"-6"-6" (0.10 m & 0.15 m)	Yes Up to 6"-6"-6" (0.15 m)	Yes 4"-4"-4" (0.10 m)	No	No
Passing Lane Capability	Yes	Yes	No	No	No
Blade Style	Scissor	Scissor	Guillotine	N/A	N/A
In-Groove Capability	Yes	Yes	Yes	Yes	Yes
Hot Inlay Capability	Yes	Yes	Yes	N/A	N/A
Squeeze Handle Tape Initiator	Yes	No	Yes	No	No
Cleaning—Easy Blade Disassembly	No	No	Yes	N/A	N/A
Weight of Each Unit	160 lbs. (72.57 kg)	325 lbs. (147.42 kg)	170 lbs. (77.11 kg)	43 lbs. (19.50 kg)	250 lbs. (113.49 kg)

*Replacement parts all available at Century Tool, Inc. Upgrades and improvements are continuously being made. Contact Century Tool for the latest options or upgrade kits for your machine.

Keep moving forward at [3M.com/PavementMarkings](https://www.3m.com/PavementMarkings).



Transportation Safety Division
3M Center, Building 225-4N-14
St. Paul, MN 55144-1000
[3M.com/PavementMarkings](https://www.3m.com/PavementMarkings)



Please recycle. Printed in USA.
3M is a trademark of 3M.
© 3M 2019. All rights reserved.