



Figure 1: Activated, solar-powered RRFB on a center island at an unsignalized intersection—beacons flash using an irregular flash pattern that is similar to emergency flashers on police vehicles

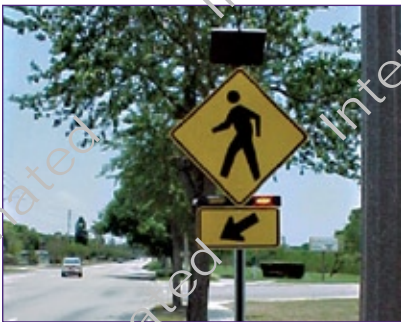


Figure 2: Activated, solar-powered, roadside RRFB at a mid-block crosswalk

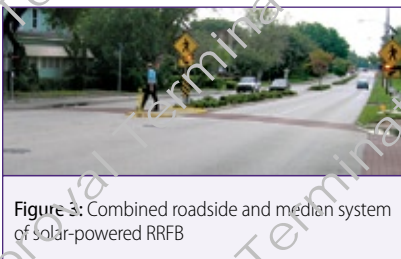


Figure 3: Combined roadside and median system of solar-powered RRFB

Learn More

Michael Frederick, St. Petersburg Neighborhood Transportation Manager

727.893.7843

michael.frederick@stpete.org

Ed Rice, Intersection Safety Team Leader
FHWA Office of Safety

202.366.9064

ed.rice@dot.gov

See Also:

http://mutcd.fhwa.dot.gov/resources/interim_approval/ia11/stpetersburgrpt/intro.htm
http://www.stpete.org/pdf/ite_paper_07.pdf

Agency Experience

"An Analysis of the Effects of Stutter Flash LED Beacons to Increase Yielding to Pedestrians Using Multilane Crosswalks," along with "The Use of Stutter Flash LED Beacons to Increase Yielding to Pedestrians at Crosswalks," presented at the Transportation Research Board Annual Meeting in 2008, summarized the results of two studies on the effects of RRFBs when used to supplement standard pedestrian crossing warning signs at crosswalks¹.

The former found that going from a no-beacon arrangement to a two-beacon system, mounted on the supplementary warning sign on the right side of the crossing, increased yielding from 18 percent to 81 percent. There was a further increase in yielding behavior, with a four-beacon system (with two beacons on both the right and left side of the crossing) to 88 percent. "An Analysis of the Effects of Stutter Flash LED Beacons to Increase Yielding to Pedestrians Using Multilane Crosswalks" also evaluated the sites over a 1-year period, and found that there was little to no decrease in yielding behavior over time.

Implementation Considerations

- Including RRFBs on the roadside increases driver yielding behavior significantly. Including RRFBs on a center island or median as well can further increase driver yielding behavior, although with a lower marginal benefit than roadside beacons.
- RRFBs can use manual push-buttons or automated passive (e.g., video or infrared) pedestrian detection, and should be unlit when not activated.
- RRFBs typically receive power by standalone solar panel units, but may also be wired to a traditional power source.

Manual on Uniform Traffic Control Devices (MUTCD) Specifications

- The MUTCD gave interim approval to RRFBs for optional use in limited circumstances in July 2008. The interim approval allows for usage as a warning beacon to supplement standard pedestrian crossing warning signs and markings at either a pedestrian or school crossing; where the crosswalk approach is not controlled by a yield sign, stop sign, or traffic-control signal; or at a crosswalk at a roundabout.
- The MUTCD interim approval memo also contains other provisions for the implementation of the device and should be reviewed (http://mutcd.fhwa.dot.gov/resources/interim_approval/ia11/fhwamemo.htm).

Costs

- Cost is approximately \$10,000 to \$15,000 for purchase and installation of two units (one on either side of a street). This includes solar panels for powering the units, pad lighting, indication units (for both sides of street) with RRFBs in the back and front of each unit, signage on both approaches, all posts, and either passive infrared detection or push buttons with audio instructions.

Costs would be proportionately higher for additional units placed on a median island, etc.

¹The two known studies of stutter flash were both conducted in Florida—one in Miami Beach and one in St. Petersburg. They are:

Sherbutt, J., R. Van Houten, and S. Turner. "An Analysis of the Effects of Stutter Flash LED Beacons to Increase Yielding to Pedestrians Using Multilane Crosswalks." Presented at the Transportation Research Board Annual Meeting, Washington, DC, 2008.

Van Houten, R., R. Ellis, and E. Marmolejo. "The Use of Stutter Flash LED Beacons to Increase Yielding to Pedestrians at Crosswalks." Presented at the Transportation Research Board Annual Meeting, Washington, DC, 2008.